

**GEN 4 – REV C
LOCKER INSTALLATION MANUAL**

Locker Type	Model	Locker Type	Model
Main	A4B.E	4 Door	A4G.E
Add On	A4D.E	44 door	A4X.E
All Medium	A4E.E	All Small (w/4 med. doors)	A4M.E
Oversized	A4F.E	Custom Configuration	A4K.E

STEP 8: MOUNT AND CONNECT TOUCHSCREEN

20-21


Technical Support: **415-390-0123 x992**

Step 8: Mount and Connect the Touchscreen



- Unscrew the touchscreen housing nuts from the back of the door.
- Insert the touchscreen with power port on the left and camera on the right, when looking at the front of the screen. This means the Home button should be hidden on the left.
- Next Plug an Ethernet cable into an open port on the router or switch.
- Plug the other end of the Ethernet cable into the Ethernet to USB adapter
- Plug the Ethernet to USB adapter into the USB to lightning adapter.
- Plug USB to lightning adapter into the touchscreen
- **Plug the touchscreen charger into the backup side of Battery Backup (As shown in Step 3: Prepare the Main Unit)**
- Plug the touchscreen charging cable into the USB to lightning adapter

Touchscreen networking components list:

1. Touchscreen
2. Touchscreen charger and cable
3. Router
4. 3-foot Ethernet cable
5. USB to Ethernet adapter
6. USB to lightning adapter

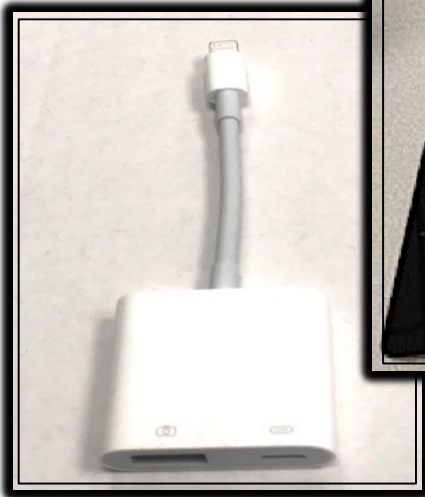

USB to Lightning Adapter

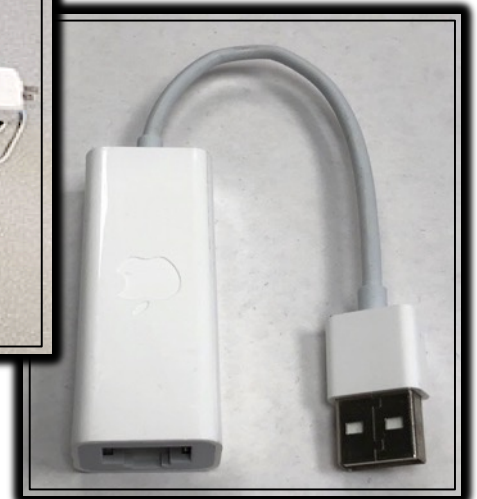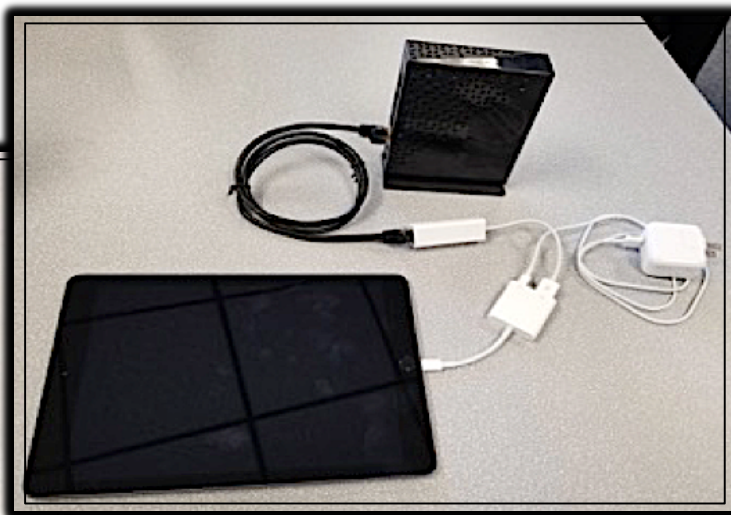

USB to Ethernet adapter

Access the Touchscreen settings:

- **Ensure Wi-Fi is turned OFF**
- In the Wi-Fi settings you will see “Ethernet”. Press on “Ethernet”. If set-up has been completed correctly you will see an IP addresses listed.
- **Ensure Bluetooth Is ON**

Completed Setup

- Once these steps are complete use zip ties to strain relieve and neatly guide the adapters and wires as shown below.

